


1103007708  
UNLESS OTHERWISE SPECIFIED DIMENSIONS WITHOUT TOLERANCES ARE REFERENCE ONLY

NOTES  
1. ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .010 T.I.R. WITH INDICATOR ON OUTSIDE DIA. OF GROUND RING GAUGE BEING STATIONARY WITH RESPECT TO THE MOTOR.

LEADS

TERMINAL BOARD

EXTERNAL CONNECTIONS

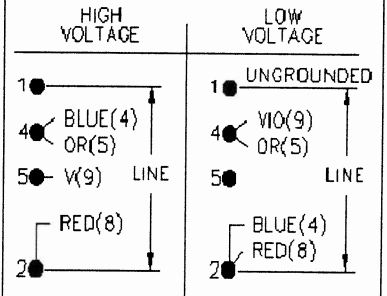

**MOTOR DATA**

TYPE	CSIR	FRAME	56 CZ	PH	1	ENCLOSURE	OPEN	END CAP	UNASSEMBLED	MEWING LEAD END	MOTOR ROTATION	REV
		60 HZ		50 HZ		BEARINGS		BALL / BALL		ASSEMBLY ROTATION		CW
HP		.50		-		PAINT		GRAY PRIME SHELL		ASSEMBLY VOLTAGE		HIGH
SF		1.15		-		MOUNTING POSITION		HORIZONTAL / VERT DOWN		THE RMALLY PROTECTED		TYPE N MANUAL
RPM		3450		-		SHAFT MATERIAL		STRESS PROOF		WINDING AND TEST SPEC		331762
VOLTS		115 / 230		-		ENVIRONMENTAL CONDITION		NORMAL		CUSTOMER NAME		REMA DRI VAC CORP.
FLA AMPS		6.8/3.4		-		HAZARDOUS CLASSIFICATION		TEMP CODE -		CUSTOMER PART NO.		113876.00
S.F. AMPS		7.4/3.7		-						DRAWN		GWB 7-14-10
TIME RATE	CONT		MAX AMB.	40° C						APPROVED		-
KVA CODE	J		INS. CLASS	B						RELEASED		-

**BLUFFTON MOTOR WORKS**

MODEL NUMBER  
**1103007708**